

Epix Acoustic Wall Panels are design forward structures created to diffuse and clarify sound in your entertainment environments. Innovative design & LED back lighting effects are the designers choice for incorporating form and function.



VANGUARD




DECO

SOUND PROOF WITH STYLE

Acoustic panels not only absorb and difuse sound in your entertainment and relaxation environments, but can add high end design as well

DESIGN, TEXTURE, ACOUSTICS

Ideal in home theaters, recording studios, hospitality and wellness applications. Epixsky acoustic wall panels come in 3 standard designs and fabrics with backlit controllable color changing or single color LED lights. Custom designs and fabric colors available.

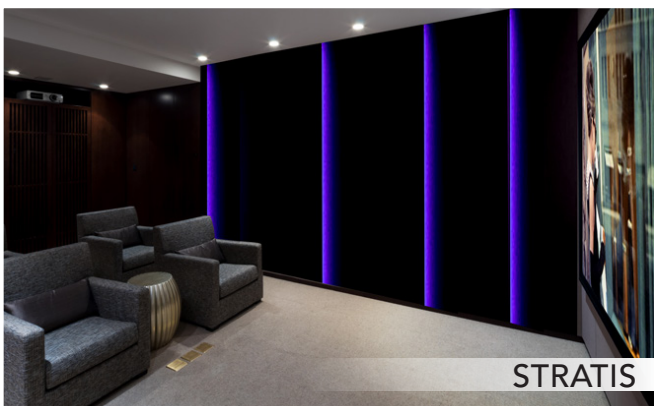

STRATIS

X2Technology

FASTER SMOOTHER COMMUNICATION

- 1 inch high quality fabric acoustical panels
- UL fire rated materials
- Lighting can be controlled independently or via home automation RS232 serial command.
- Wifi option for control flexibility.
- 5 Year Limited Warranty

EpiXsky

A Division on Impact Lighting Inc.

SPECIFICATION ACOUSTIC PANELS

PROJECT	DATE
TYPE	QTY



FABRIC COLOR OPTIONS FOR ACOUSTIC WALL PANEL ART

LIME	CHARTREUSE	CARDINAL	SKY
TEAL	FIR	YELLOW	SAPPHIRE
ORANGE	BLUE PAPIER	WHEAT	* EGGSHELL
WEDGEWOOD	BALTIC	CRYSTAL BLUE	* WHITE
GREY MIX	* MEDIUM GREY	QUARTZ	AQUAMARINE
OPAL	CHERRY NEUTRAL	BLUE NEUTRAL	GREEN NEUTRAL
VANILLA NEUTRAL	APRICOT NEUTRAL	LAVENDAR NEUTRAL	SILVER NEUTRAL
* BLACK	CLARET ACCENT	COBALT	CINNABAR
PUMICE	BUFF	BLUE SPRUCE	EUCALYPTUS
ULTRAMARINE	STEEL GREY	PEARL	* BAYBERRY
SILVER PAPIER	* BLUE PLUM	DEEP BURGUNDY	VERTE PAPIER
STRAW	BONE	DUNE	CEMENT MIX
TERRA	LIGHT MOSS	LEAF	STREAM
DESERT SAND	EARTH	CHOCOLATE	COIN
FLANNEL	MOLESKIN	SUNSHINE	IRIS
	RED	AMETHYST	

(* Standard Colors)

SPECIFICATIONS:

CONTENT:
100% post-consumer recycled polyester

WEIGHT:
16.0 ± 0.5 oz./lin. yd.

WIDTH:
66" min. useable

REPEAT:
none

BACKING:
none

TREATMENT:
none

CLEANING CODE:

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

PERFORMANCE:

BREAKING STRENGTH (ASTM D5034)
150 lbf min. warp and fill

COLORFASTNESS TO LIGHT (AATCC 16.3 OPTION 3)
Grade 4 min. at 40 hours

COLORFASTNESS TO CROCKING (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet

FLAMMABILITY
ASTM E84 Class I or A.



Terratex is a registered trademark of Duvaltex and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

ORDERING

MODEL	—	COLOR	—	COLOR 2
APF				
Acoustic Panel Fabric		Choose From Above		Choose From Above

EpiXsky

A Division on Impact Lighting Inc.