

**SPECIFICATION**  
**ES-LED-RGBW-M**

PROJECT	DATE
TYPE	QTY



LED Controller & Remote

**INTELLIGENT SERIES**



**ACTUAL SIZE**

**DESCRIPTION:**

The ES-LED-RGBW M series LED controller can work with up to 10 remotes which means using just one controller can achieve single color/CT dimming, and RGB/RGBW adjustment to meet different lighting requirements. The RF remote controls single colors, brightness, and speed. You can also customise and save color and light changing modes.

**REMOTE SPECIFICATIONS:**

- Working Voltage: 3V DC(battery CR2032)
- Working Frequency: 433.92MHz
- Remote Distance: 30m
- Working Temp.: -30°C ~ 55°C
- Weight (N.W.): 42g

**CONTROLLER SPECIFICATIONS:**

- Input Voltage: 5~24V DC
- Max Current Load: 5A×4CH Max 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temp.: -30°C~55°C
- Weight(N.W.): 125g



**ORDERING**

**MODEL**

**ES-LED-RGBW-M**

LED Controller and Remote




A Division on Impact Lighting Inc.

3100 Pennington Road, Orlando Florida 32804 • Ph. 1-800-507-5714 • Email: sales@epiXsky.com


[epiXsky.com](http://epiXsky.com)

USER GUIDE  
**ES-LED-RGBW-M**

LED Controller & Remote

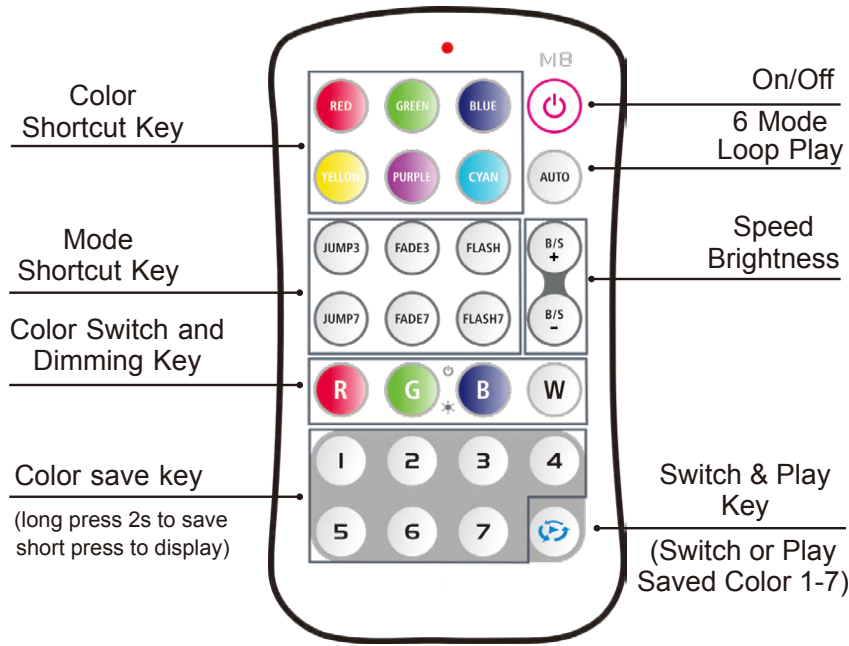

E.g. 1: Connected 12V lamp, loads 1~240W (5A×4CH×12V).

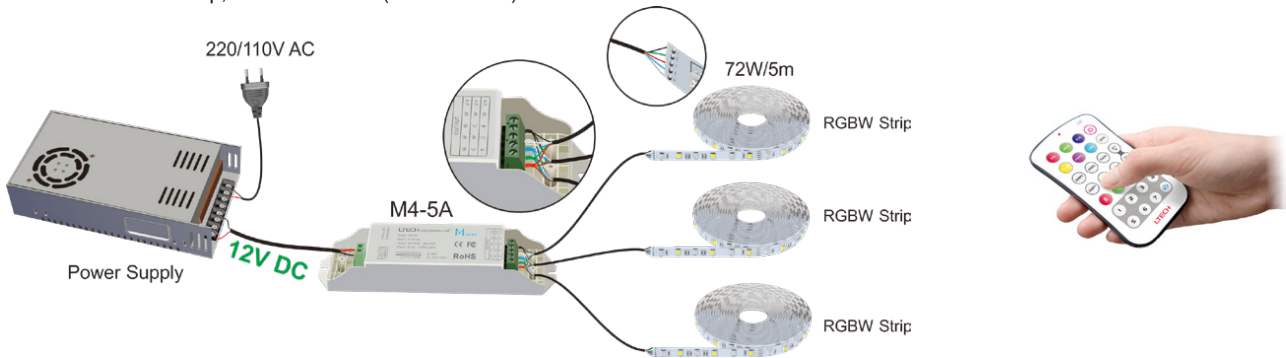

E.g. 2: Connected 24V lamp, loads 1~480W (5A×4CH×24V).

