# SPECIFICATION
# STICK-GU2

| PROJECT | DATE |
|---|---|
| TYPE | QTY |

**epiXsky**
*experience light*

TOUCH SENSITIVE INTELLIGENT CONTROL KEYPAD

## INTELLIGENT SERIES



3.4″
86mm

3.4″
86mm

**STICK-GU2**



Port    Power    DMX

10mm

Micro USB
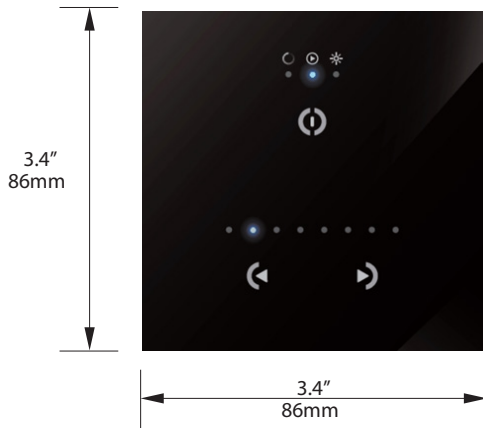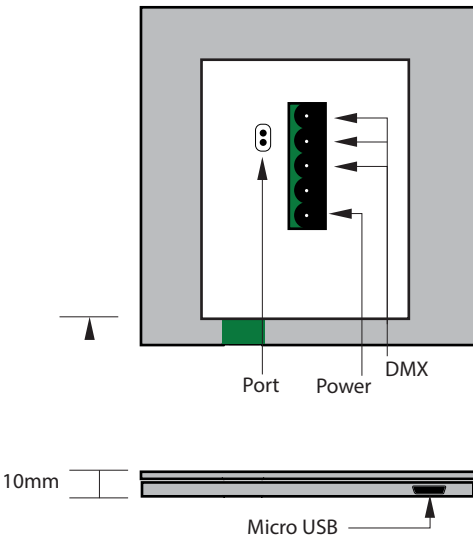
### DESCRIPTION:
The STICK GU2 is one of our most exciting developments within the architectural market. The controller comes pre loaded with RGB effects and can be programmed with the Easy Stand Alone software.

### FEATURES:
- DMX Stand Alone Controller (128 channels) with a glass face
- 3 touch sensitive buttons (on/off, mode, previous, next)
- Up to 24 dynamic or static scenes (8 first visualized by a led)
- Live setting of the intensity and color of a scene
- Programmable through the included USB cable and control software
- Compatible with any DMX fixture or DMX LED driver
- Ready to use (pre-loaded with 8 scenes and 42 RGB fixtures)
- Latest ARM CPU technology
- Customized design for OEM, wall mountable
- One dry contact trigger port on PCB

### AVAILABLE MEMORY (depending on number of scenes used)

| CHANNELS | STEPS (using 8 scenes) |
|---|---|
| 8 | 1691 |
| 16 | 1011 |
| 32 | 557 |
| 48 | 383 |
| 64 | 291 |
| 80 | 233 |
| 96 | 195 |
| 112 | 166 |
| 128 | 145 |

### SPECIFICATIONS

| | |
|---|---|
| Package | Controller,CD Rom, USB Cable, Connector Block |
| OS Requirement | Mac OSx 10.6/10.7/10.8 - Windows XP/VISTA/SEVEN/8 32/64 bits and USB 2.0 |
| Software | Easy Stand Alone, ESA2 (PC & Mac) |
| Versions | Black or White glass design |
| Connections | Power (2pins)  DMX (3pins)  Port (2 pins)  Micro-usb |
| Power | From 5V to 12V DC (AC/DC adapter in option). Max 5.5v with USB |
| Certifications | EC, EMC, ROHS, ETL, UL (some are in process) |
| Keypad | 86x86x10 mm |
| Weight | 110g |
| Measurements | (package size) 140x135x50 mm     365g |
| Temperature | 0ºC to 50ºC |
| Environment | IP20 |

## ORDERING

### MODEL

**STICK-GU2**

Stand alone
wall-mounted
DMX controller